



**NEW
STRUCTURE.**

**RAISING
THE VALUE
OF PERFORMANCE.**

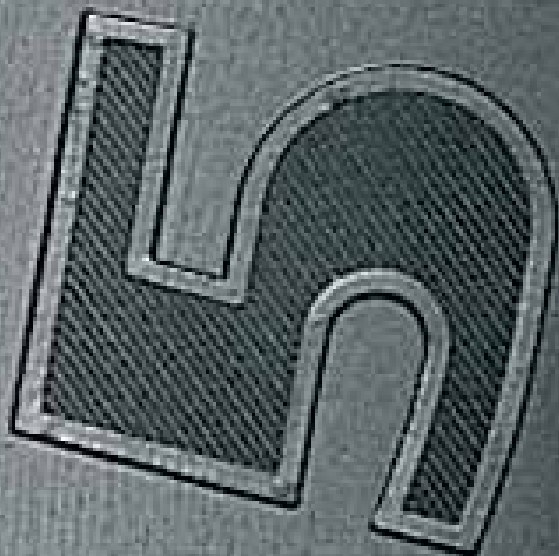

13 R 22.5

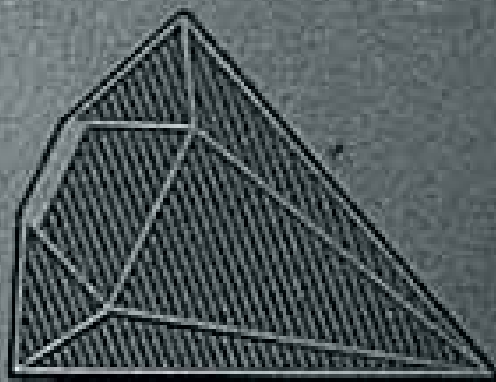

FG85



TG85




TQ99

PIRELLI

The new 13 R 22.5 Diamante Zero Degree structure assures extreme integrity and high retreadability in mixed applications, designed for road, yard and site work.

The 13 R 22.5 Diamante tyre gives greater resistance to tread abrasion, tears and lacerations experienced by ON-OFF and OFF applications.





FG85

FG85
TG85

TG85
TQ99


TG85
TQ99

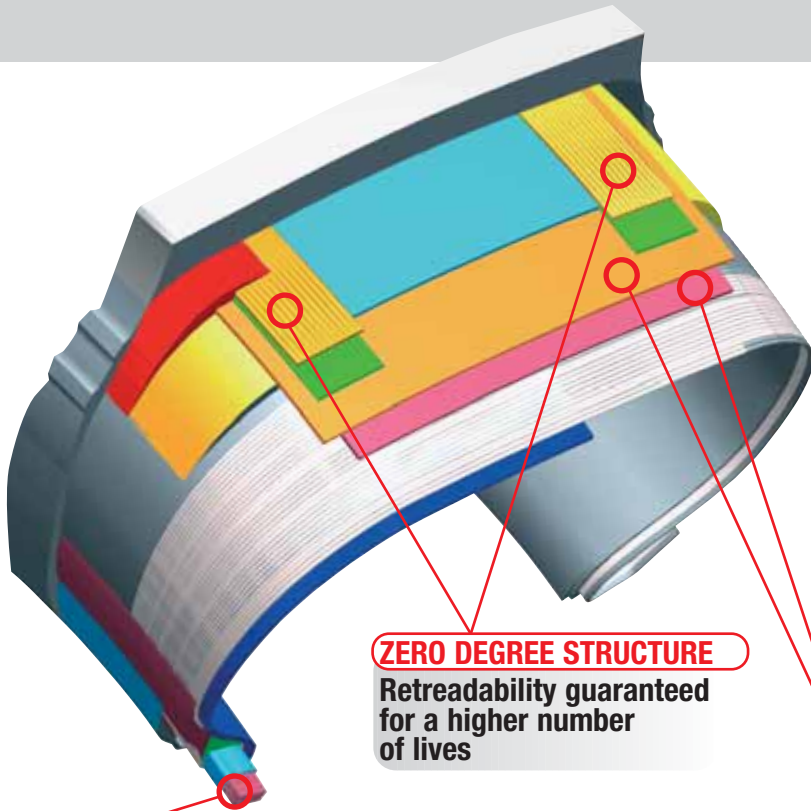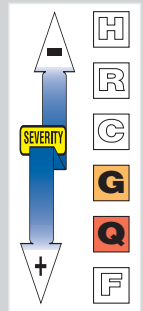

ZERO DEGREE STRUCTURE
Retreadability guaranteed for a higher number of lives

HONEYCOMB BEAD
High flexibility for easy fitting

Pirelli's technical development applied to 13 R 22.5 enhances performance in terms of:

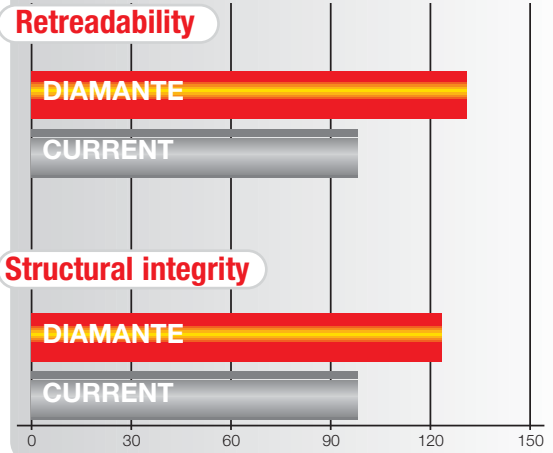

CORD GEOMETRY/CORD COMPOUND
Boosts structural integrity



FG85 **DIAMANTE**



TG85 **DIAMANTE**



TQ99 **DIAMANTE**

13 R 22.5

Dimensions mm

TREAD PATTERN/SIZE	SECTION WIDTH	DIAMETER	STATIC LADEN RADIUS	ROLLING CIRCUMFERENCE	RIM (inches)	MINIMUM DUAL SPACING
FG85 13 R 22.5 156/150 K (154/150 L)	308	1127	522	3437	9.00 - 9.75	351 - 360
TG85 13 R 22.5 156/150 K (154/150 L)	308	1131	524	3450	9.00 - 9.75	351 - 360
TQ99 13 R 22.5 156/150 F (154/150 G)	308	1135	525	3462	9.00 - 9.75	351 - 360



www.pirellityre.com

Edited April 2008. Pirelli reserves the right to modify data contained in this leaflet without notice.